

Osnovne trigonometrijske jednakosti

$$\sin x = \frac{1}{2j}(e^{jx} - e^{-jx})$$

$$\cos x = \frac{1}{2}(e^{jx} + e^{-jx})$$

$$\sin\left(x \pm \frac{\pi}{2}\right) = \pm \cos x$$

$$\cos\left(x \pm \frac{\pi}{2}\right) = \mp \sin x$$

$$\sin(x \pm y) = \sin x \cos y \pm \cos x \sin y$$

$$\cos(x \pm y) = \cos x \cos y \mp \sin x \sin y$$

$$\sin x + \sin y = 2 \sin \frac{x+y}{2} \cos \frac{x-y}{2}$$

$$\sin x - \sin y = 2 \sin \frac{x-y}{2} \cos \frac{x+y}{2}$$

$$\cos x + \cos y = 2 \cos \frac{x+y}{2} \cos \frac{x-y}{2}$$

$$\cos x - \cos y = 2 \sin \frac{x+y}{2} \sin \frac{y-x}{2}$$

$$\sin x \sin y = \frac{1}{2}(\cos(x-y) - \cos(x+y))$$

$$\cos x \cos y = \frac{1}{2}(\cos(x-y) + \cos(x+y))$$

$$\sin x \cos y = \frac{1}{2}(\sin(x-y) + \sin(x+y))$$

$$\sin(2x) = 2 \sin x \cos x$$

$$\cos(2x) = \cos^2 x - \sin^2 x$$

$$\sin(3x) = 3 \sin x - 4 \sin^3 x$$

$$\cos(3x) = 4 \cos^3 x - 3 \cos x$$

$$2 \sin^2 x = 1 - \cos(2x)$$

$$2 \cos^2 x = 1 + \cos(2x)$$

$$4 \sin^3 x = 3 \sin x - \sin(3x)$$

$$4 \cos^3 x = 3 \cos x + \cos(3x)$$

$$8 \sin^4 x = 3 - 4 \cos(2x) + \cos(4x)$$

$$8 \cos^4 x = 3 + 4 \cos(2x) + \cos(4x)$$

$$a \cos x - b \sin x = r \cos(x + \phi)$$

$$r = \sqrt{a^2 + b^2}$$

$$\operatorname{tg} \phi = b/a$$

$$a = r \cos \phi$$

$$b = r \sin \phi$$

Tablice suma i integrala

Konačne sume

$$\sum_{i=1}^n i = \frac{n(n+1)}{2}$$

$$\sum_{i=1}^n i^2 = \frac{n(n+1)(2n+1)}{6}$$

$$\sum_{i=1}^n i^3 = \frac{n^2(n+1)^2}{4}$$

$$\sum_{i=0}^n x^i = \frac{x^{n+1} - 1}{x - 1}$$

$$\sum_{i=0}^n e^{j(\theta+n\phi)} = \frac{\sin((n+1)\phi/2)}{\sin(\phi/2)} e^{j(\theta+n\phi/2)}$$

$$\sum_{i=0}^n \binom{n}{i} = \sum_{i=1}^n \frac{n!}{i!(n-i)!} = 2^n$$

Neodređeni integrali

Racionalne funkcije

$$\int (ax+b)^n dx = \frac{(ax+b)^{n+1}}{a(n+1)}, \quad 0 < n$$

$$\int \frac{1}{ax+b} dx = \frac{1}{a} \ln |ax+b|$$

$$\begin{aligned} \int \frac{1}{ax^2+bx+c} dx &= \\ &= \frac{2}{\sqrt{4ac-b^2}} \operatorname{tg}^{-1} \left(\frac{2ax+b}{\sqrt{4ac-b^2}} \right), & b^2 < 4ac \\ &= \frac{1}{\sqrt{b^2-4ac}} \ln \left| \frac{2ax+b-\sqrt{b^2-4ac}}{2ax+b+\sqrt{b^2-4ac}} \right|, & b^2 > 4ac \\ &= \frac{-2}{2ax+b}, & b^2 = 4ac \end{aligned}$$

$$\begin{aligned} \int \frac{x dx}{ax^2+bx+c} &= \\ &= \frac{1}{2a} \ln |ax^2+bx+c| - \frac{b}{2a} \int \frac{dx}{ax^2+bx+c} \end{aligned}$$

$$\int \frac{dx}{a^2x^2+b^2} = \frac{1}{ab} \operatorname{tg}^{-1} \left(\frac{ax}{b} \right)$$

$$\int \frac{x dx}{a^2+x^2} = \frac{1}{2} \ln(a^2+x^2)$$

$$\int \frac{x^2 dx}{a^2+x^2} = x - a \operatorname{tg}^{-1} \left(\frac{x}{a} \right)$$

$$\int \frac{dx}{(a^2+x^2)^2} = \frac{x}{2a^2(a^2+x^2)} + \frac{1}{2a^3} \operatorname{tg}^{-1} \left(\frac{x}{a} \right)$$

$$\int \frac{x dx}{(a^2+x^2)^2} = \frac{-1}{2(a^2+x^2)}$$

$$\int \frac{x^2 dx}{(a^2+x^2)^2} = \frac{-x}{2(a^2+x^2)} + \frac{1}{2a} \operatorname{tg}^{-1} \left(\frac{x}{a} \right)$$

Trigonometrijske funkcije

$$\int \cos(x) dx = \sin(x)$$

$$\int x \cos(x) dx = \cos(x) + x \sin(x)$$

$$\int x^2 \cos(x) dx = 2x \cos(x) + (x^2 - 2) \sin(x)$$

$$\int \sin(x) dx = -\cos(x)$$

$$\int x \sin(x) dx = \sin(x) - x \cos(x)$$

$$\int x^2 \sin(x) dx = 2x \sin(x) + (2 - x^2) \cos(x)$$

Eksponencijalne funkcije

$$\int e^{ax} dx = \frac{1}{a} e^{ax}$$

$$\int x e^{ax} dx = \left(\frac{x}{a} - \frac{1}{a^2} \right) e^{ax}$$

$$\int x^2 e^{ax} dx = \left(\frac{x^2}{a} - \frac{2x}{a^2} + \frac{2}{a^3} \right) e^{ax}$$

$$\int x^3 e^{ax} dx = \left(\frac{x^3}{a} - \frac{3x^2}{a^2} + \frac{6x}{a^3} - \frac{6}{a^4} \right) e^{ax}$$

$$\int \sin(x) e^{ax} dx = \frac{1}{a^2 + 1} (a \sin(x) - \cos(x)) e^{ax}$$

$$\int \cos(x) e^{ax} dx = \frac{1}{a^2 + 1} (a \cos(x) + \sin(x)) e^{ax}$$

Određeni integrali

$$\int_{-\infty}^{+\infty} e^{-a^2 x^2 + bx} dx = \frac{\sqrt{\pi}}{a} e^{\frac{b^2}{4a^2}}, \quad a > 0$$

$$\int_0^{+\infty} x^2 e^{-x^2} dx = \frac{\sqrt{\pi}}{4}$$

$$\int_0^{+\infty} \frac{\sin(x)}{x} dx = \frac{\pi}{2}$$

$$\int_0^{+\infty} \frac{\sin^2(x)}{x^2} dx = \frac{\pi}{2}$$

Fourierova transformacija

Fourierova transformacija funkcije $x(t)$ je:

$$\mathcal{F}[x(t)] = X(\omega) = \int_{-\infty}^{+\infty} x(t) e^{-j\omega t} dt$$

Inverzna transformacija je:

$$\mathcal{F}^{-1}[X(\omega)] = x(t) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} X(\omega) e^{j\omega t} d\omega$$

Funkcija $x(t)$ i njen spektar $X(\omega)$ čine transformacijski par:

$$x(t) \circledcirc X(\omega)$$

Dovoljni (ali ne i nužni) uvjeti za postojanje transformacije funkcije $x(t)$ su:

1. Funkcija $x(t)$ zadovoljava Dirichletove uvjete (funkcija je ograničena s konačnim brojem maksimuma i minimuma te konačnim brojem diskontinuiteta u bilo kojem konačnom vremenskom intervalu).

2. $\int_{-\infty}^{+\infty} |x(t)| dt < \infty$

Svojstva Fourierove transformacije

Neka je $x(t) \circledcirc X(\omega)$ i neka su α_i , t_0 i ω_0 konstante. Fourierova transformacija tada zadovoljava sljedeća svojstva:

Linearnost

$$x(t) = \sum_{i=1}^n \alpha_i x_i(t) \circledcirc \sum_{i=1}^n \alpha_i X_i(\omega) = X(\omega)$$

Dualnost

$$X(t) \circledcirc 2\pi x(-\omega)$$

Pomak u vremenu i frekvenciji

$$x(t - t_0) \circledcirc X(\omega) e^{-j\omega t_0}$$

$$x(t) e^{j\omega_0 t} \circledcirc X(\omega - \omega_0)$$

Skaliranje

$$x(\alpha t) \circledcirc \frac{1}{|\alpha|} X\left(\frac{\omega}{\alpha}\right)$$

Deriviranje

$$\frac{d^n x(t)}{dt^n} \circlearrowright \bullet (j\omega)^n X(\omega)$$

$$(-jt)^n x(t) \circlearrowright \bullet \frac{d^n X(\omega)}{d\omega^n}$$

Integriranje

$$\int_{-\infty}^t x(\tau) d\tau \circlearrowright \bullet \pi X(0) \delta(\omega) + \frac{X(\omega)}{j\omega}$$

$$\pi x(0) \delta(t) - \frac{x(t)}{jt} \circlearrowright \bullet \int_{-\infty}^{\omega} X(\xi) d\xi$$

Konjugacija

$$x^*(t) \circlearrowright \bullet X^*(-\omega)$$

$$x^*(-t) \circlearrowright \bullet X^*(\omega)$$

Konvolucija

$$\int_{-\infty}^{+\infty} x_1(\tau) x_2(t - \tau) d\tau \circlearrowright \bullet X_1(\omega) X_2(\omega)$$

$$x_1(t) x_2(t) \circlearrowright \bullet \frac{1}{2\pi} \int_{-\infty}^{+\infty} X_1(\xi) X_2(\omega - \xi) d\xi$$

Korelacija

$$\int_{-\infty}^{+\infty} x_1^*(\tau) x_2(t + \tau) d\tau \circlearrowright \bullet X_1^*(\omega) X_2(\omega)$$

$$x_1^*(t) x_2(t) \circlearrowright \bullet \frac{1}{2\pi} \int_{-\infty}^{+\infty} X_1^*(\xi) X_2(\omega + \xi) d\xi$$

Parsevalov teorem

$$\int_{-\infty}^{+\infty} x_1^*(t) x_2(t) dt = \frac{1}{2\pi} \int_{-\infty}^{+\infty} X_1^*(\omega) X_2(\omega) d\omega$$

$$\int_{-\infty}^{+\infty} |x(t)|^2 dt = \frac{1}{2\pi} \int_{-\infty}^{+\infty} |X(\omega)|^2 d\omega$$

Tablica \mathcal{F} transformacije

Neka je:

$$s(x) = \begin{cases} 1, & x > 0 \\ 0, & x < 0 \end{cases}$$

$$\text{rect}(x) = \begin{cases} 1, & -\frac{1}{2} < x < \frac{1}{2} \\ 0, & \frac{1}{2} < |x| \end{cases}$$

$$\text{tri}(x) = \begin{cases} 1 - |x|, & |x| < 1 \\ 0, & |x| > 1 \end{cases}$$

$$\text{sinc}(x) = \frac{\sin(\pi x)}{\pi x}$$

Uz te oznake važnije transformacije su:

$$1 \circlearrowright \bullet 2\pi \delta(\omega)$$

$$\delta(t) \circlearrowright \bullet 1$$

$$s(t) \circlearrowright \bullet \pi \delta(\omega) + \frac{1}{j\omega}$$

$$\frac{1}{2} \delta(t) - \frac{1}{2\pi jt} \circlearrowright \bullet s(\omega)$$

$$\text{sgn}(t) \circlearrowright \bullet \frac{2}{j\omega}$$

$$\text{rect}\left(\frac{t}{T}\right) \circlearrowright \bullet T \text{sinc}\left(\frac{\omega T}{2\pi}\right)$$

$$\text{sinc}(at) \circlearrowright \bullet \frac{1}{a} \text{rect}\left(\frac{\omega}{2\pi a}\right)$$

$$\text{tri}\left(\frac{t}{T}\right) \circlearrowright \bullet T \text{sinc}^2\left(\frac{\omega T}{2\pi}\right)$$

$$\text{sinc}^2(at) \circlearrowright \bullet \frac{1}{a} \text{tri}\left(\frac{\omega}{2\pi a}\right)$$

$$e^{j\omega_0 t} \circlearrowright \bullet 2\pi \delta(\omega - \omega_0)$$

$$\delta(t - t_0) \circlearrowright \bullet e^{-j\omega t_0}$$

$$\sin(\omega_0 t) \circlearrowright \bullet -j\pi (\delta(\omega - \omega_0) - \delta(\omega + \omega_0))$$

$$\cos(\omega_0 t) \circlearrowright \bullet \pi (\delta(\omega - \omega_0) + \delta(\omega + \omega_0))$$

$$\sum_{i=-\infty}^{+\infty} \delta(t - iT_0) \circlearrowright \bullet \frac{2\pi}{T_0} \sum_{i=-\infty}^{+\infty} \delta\left(\frac{\omega}{2\pi} - \frac{i}{T_0}\right)$$

$$\sin(\omega_0 t) s(t) \circlearrowright \bullet -\frac{j\pi}{2} (\delta(\omega - \omega_0) - \delta(\omega + \omega_0)) + \frac{j\omega}{\omega_0^2 - \omega^2}$$

$$\cos(\omega_0 t) s(t) \circlearrowright \bullet \frac{\pi}{2} (\delta(\omega - \omega_0) + \delta(\omega + \omega_0)) + \frac{j\omega}{\omega_0^2 - \omega^2}$$

$$e^{-at} s(t) \circlearrowright \bullet \frac{1}{a + j\omega}, \quad a > 0$$

$$te^{-at} s(t) \circlearrowright \bullet \frac{1}{(a+j\omega)^2}, \quad a > 0$$

$$t^2 e^{-at} s(t) \circlearrowright \bullet \frac{2}{(a+j\omega)^3}, \quad a > 0$$

$$t^3 e^{-at} s(t) \circlearrowright \bullet \frac{6}{(a+j\omega)^4}, \quad a > 0$$

$$e^{-a|t|} \circlearrowright \bullet \frac{2a}{a^2 + \omega^2}$$

$$e^{-\frac{t^2}{2a^2}} \circlearrowright \bullet a\sqrt{2\pi}e^{-a^2\omega^2/2}$$

Vremenski diskretna Fourierova transformacija

Vremenski diskretna Fourierova transformacija (DTFT – Discrete-Time Fourier Transform) niza $x[n]$ je:

$$\mathcal{F}_{vd}[x[n]] = X(\omega) = \sum_{n=-\infty}^{+\infty} x[n]e^{-j\omega n}$$

Inverzna transformacija je:

$$\mathcal{F}_{vd}^{-1}[X(\omega)] = x[n] = \frac{1}{2\pi} \int_{-\pi}^{+\pi} X(\omega)e^{j\omega n} d\omega$$

Niz $x[n]$ i njegov spektar $X(\omega)$ čine transformacijski par:

$$x[n] \circlearrowright \bullet X(\omega)$$

Dovoljan (ali ne i nužni) uvjet za postojanje transformacije niza $x[n]$ je apsolutna sumabilnost:

$$\sum_{n=-\infty}^{+\infty} |x[n]| < \infty$$

Svojstva vremenski diskretne Fourierove transformacije

Neka je $x[n] \circlearrowright \bullet X(\omega)$ i neka su α_i , n_0 i ω_0 konstante. Vremenski diskretna Fourierova transformacija tada zadovoljava sljedeća svojstva:

Linearnost

$$x[n] = \sum_{i=1}^n \alpha_i x_i[n] \circlearrowright \bullet \sum_{i=1}^n \alpha_i X_i(\omega) = X(\omega)$$

Pomak u vremenu i frekvenciji

$$x[n - n_0] \circlearrowright \bullet X(\omega)e^{-j\omega n_0}$$

$$x[n]e^{j\omega_0 n} \circlearrowright \bullet X(\omega - \omega_0)$$

Deriviranje i diferenciranje

$$\Delta x[n] \circlearrowright \bullet (e^{j\omega} - 1)X(\omega)$$

$$n^i x[n] \circlearrowright \bullet j^i \frac{d^i X(\omega)}{d\omega^i}$$

Sumiranje

$$\sum_{i=-\infty}^n x[i] \circlearrowright \bullet \frac{1}{1 - e^{-j\omega}} X(\omega)$$

Konjugacija

$$x^*[n] \circlearrowright \bullet X^*(-\omega)$$

$$x^*[-n] \circlearrowright \bullet X^*(\omega)$$

Konvolucija

$$\sum_{i=-\infty}^{+\infty} x_1[i]x_2[n-i] \circlearrowright \bullet X_1(\omega)X_2(\omega)$$

$$x_1[n]x_2[n] \circlearrowright \bullet \frac{1}{2\pi} \int_{-\pi}^{+\pi} X_1(\xi)X_2(\omega - \xi) d\xi$$

Parsevalov teorem

$$\sum_{n=-\infty}^{+\infty} x_1^*[n]x_2[n] = \frac{1}{2\pi} \int_{-\pi}^{+\pi} X_1^*(\omega)X_2(\omega) d\omega$$

$$\sum_{n=-\infty}^{+\infty} |x[n]|^2 = \frac{1}{2\pi} \int_{-\pi}^{+\pi} |X(\omega)|^2 d\omega$$

Relacije simetričnosti

Neka je $x[n]$ čisto realan niz i neka je $x[n] \circlearrowright \bullet X(\omega)$. Tada je:

$$\frac{1}{2}(x[n] + x[-n]) \circlearrowright \bullet \operatorname{Re}[X(\omega)]$$

$$\frac{1}{2}(x[n] - x[-n]) \circlearrowright \bullet j \operatorname{Im}[X(\omega)]$$

Također vrijedi:

$$X(\omega) = X^*(-\omega)$$

$$\operatorname{Re}[X(\omega)] = \operatorname{Re}[X(-\omega)]$$

$$\operatorname{Im}[X(-\omega)] = -\operatorname{Im}[X(\omega)]$$

Tablica \mathcal{F}_{vd} transformacije

$$\delta[n] \circledcirc \bullet 1$$

$$1 \circledcirc \bullet \sum_{i=-\infty}^{+\infty} 2\pi\delta(\omega + 2\pi i)$$

$$e^{j\omega_0 n} \circledcirc \bullet \sum_{i=-\infty}^{+\infty} 2\pi\delta(\omega - \omega_0 + 2\pi i)$$

$$s[n] \circledcirc \bullet \frac{1}{1 - e^{-j\omega}} + \sum_{i=-\infty}^{+\infty} \pi\delta(\omega + 2\pi i)$$

$$a^n s[n] \circledcirc \bullet \frac{1}{1 - ae^{-j\omega}}, \quad |a| < 1$$

$$na^n s[n] \circledcirc \bullet \frac{ae^{j\omega}}{(e^{-j\omega} - a)^2}, \quad |a| < 1$$

$$\sin(\omega_0 n) \circledcirc \bullet \sum_{i=-\infty}^{+\infty} j\pi(\delta(\omega + \omega_0 + 2\pi i) - \delta(\omega - \omega_0 + 2\pi i))$$

$$\cos(\omega_0 n) \circledcirc \bullet \sum_{i=-\infty}^{+\infty} \pi(\delta(\omega + \omega_0 + 2\pi i) + \delta(\omega - \omega_0 + 2\pi i))$$

$$a^n \sin(\omega_0 n) s[n] \circledcirc \bullet \frac{ae^{j\omega} \sin(\omega_0)}{e^{2j\omega} - 2ae^{j\omega} \cos(\omega_0) + a^2}, \quad |a| < 1$$

$$a^n \cos(\omega_0 n) s[n] \circledcirc \bullet \frac{e^{j\omega}(e^{j\omega} - a \cos(\omega_0))}{e^{2j\omega} - 2ae^{j\omega} \cos(\omega_0) + a^2}, \quad |a| < 1$$

Diskretna Fourierova transformacija

Diskretna Fourierova transformacija konačnog niza $x[n]$ duljine N je:

$$X[k] = \sum_{n=0}^{N-1} x[n] W_N^{nk}, \quad 0 \leq k \leq N-1$$

Inverzna transformacija je:

$$x[n] = \frac{1}{N} \sum_{k=0}^{N-1} X[k] W_N^{-nk}, \quad 0 \leq n \leq N-1$$

Niz $x[n]$ i njegov spektar $X[k]$ čine transformacijski par:

$$x[n] \circledcirc \bullet X[k]$$

Pri tome je $W_N^{nk} = e^{-2\pi j nk/N}$.

Svojstva diskretne Fourierove transformacije

Neka je $x[n] \circledcirc \bullet X[k]$ i neka su α_i , n_0 i k_0 konstante. DFT tada zadovoljava sljedeća svojstva:

Linearnost

$$x[n] = \sum_{i=1}^n \alpha_i x_i[n] \circledcirc \bullet \sum_{i=1}^n \alpha_i X_i[k] = X[k]$$

Dualnost

$$X[n] \circledcirc \bullet Nx[\langle -k \rangle_N]$$

Cirkularni pomak u vremenu i frekvenciji

$$x[\langle n - n_0 \rangle_N] \circledcirc \bullet X[k] W_N^{kn_0}$$

$$x[n] W_N^{kn_0} \circledcirc \bullet X[\langle k - k_0 \rangle_N]$$

Cirkularna konvolucija

$$\sum_{i=0}^{N-1} x_1[i] x_2[\langle n - i \rangle_N] \circledcirc \bullet X_1[k] X_2[k]$$

$$x_1[n] x_2[n] \circledcirc \bullet \frac{1}{N} \sum_{i=0}^{N-1} X_1[i] X_2[\langle k - i \rangle_N]$$

Parsevalova relacija

$$\sum_{n=0}^{N-1} x_1^*[n] x_2[n] \circledcirc \bullet \frac{1}{N} \sum_{k=0}^{N-1} X_1^*[k] X_2[k]$$

$$\sum_{n=0}^{N-1} |x[n]|^2 \circledcirc \bullet \frac{1}{N} \sum_{k=0}^{N-1} |X[k]|^2$$

\mathcal{Z} -transformacija

$$\mathcal{Z}[f[n]] = \sum_{n=0}^{+\infty} f[n] z^{-n}$$

Svojstva \mathcal{Z} transformacije

Neka je $\mathcal{Z}[f[n]] = F(z)$ i $\mathcal{Z}[g[n]] = G(z)$. Tada vrijedi:

Linearnost

$$f[n] = \sum_{i=1}^n \alpha_i f_i[n] \circledcirc \bullet \sum_{i=1}^n \alpha_i F_i(z) = F(z)$$

Pomak

$$f[n+1] \circlearrowleft zF(z) - zf[0]$$

$$f[n+m] \circlearrowleft z^m F(z) - \sum_{i=0}^{m-1} f[i]z^{m-i}$$

$$f[n-1] \circlearrowleft \frac{1}{z}F(z) + f[-1]$$

$$f[n-m] \circlearrowleft z^{-m}F(z) + \sum_{i=0}^{m-1} f[i-m]z^{-i}$$

Skaliranje

$$a^n f[n] \circlearrowleft F\left(\frac{z}{a}\right)$$

Diferenciranje i deriviranje

$$\Delta f[n] \circlearrowleft (z-1)F(z)$$

$$nf[n] \circlearrowleft -z \frac{dF(z)}{dz}$$

Konvolucija

$$\sum_{i=0}^{+\infty} f[i]g[n-i] \circlearrowleft F(z)G(z)$$

Tablica \mathcal{Z} transformacije

$$\delta[n] \circlearrowleft 1$$

$$\delta[n-m] \circlearrowleft z^{-m}$$

$$n \circlearrowleft \frac{z}{(z-1)^2}$$

$$1^n \circlearrowleft \frac{1}{1-z^{-1}} = \frac{z}{z-1}$$

$$a^n \circlearrowleft \frac{1}{1-az^{-1}} = \frac{z}{z-a}$$

$$(n+1)a^n \circlearrowleft \frac{z^2}{(z-a)^2}$$

$$\frac{(n+1)(n+2)}{2!}a^n \circlearrowleft \frac{z^3}{(z-a)^3}$$

$$\frac{(n+1)(n+2)\dots(n+m-1)}{(m-1)!}a^n \circlearrowleft \frac{z^m}{(z-a)^m}$$

$$a^n - \delta[n] \circlearrowleft \frac{a}{z-a}$$

$$\sin[an] \circlearrowleft \frac{z \sin(a)}{z^2 - 2z \cos(a) + 1}$$

$$\cos[an] \circlearrowleft \frac{z^2 - z \cos(a)}{z^2 - 2z \cos(a) + 1}$$


Pregled Fourierovih transformacija

Fourierova transformacija

Fourierova transformacija se uobičajeno koristi za prikaz kontinuiranih signalova. Transformacijski par je $x(t) \leftrightarrow X(\omega)$ i vrijedi:

$$X(\omega) = \int_{-\infty}^{+\infty} x(t)e^{-j\omega t} dt$$

$$x(t) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} X(\omega)e^{j\omega t} d\omega$$

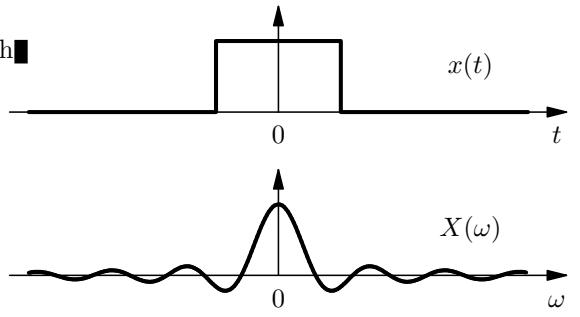


Fourierov red

Fourierov red (FS – Fourier Sum) se uobičajeno koristi samo za prikaz periodičkih kontinuiranih signalova. Transformacijski par je $x(t) \leftrightarrow X[k]$ i vrijedi:

$$X[k] = \frac{1}{T_P} \int_{T_P} x(t)e^{-j\omega_P kt} dt$$

$$x(t) = \sum_{k=-\infty}^{+\infty} X[k]e^{j\omega_P kt}$$

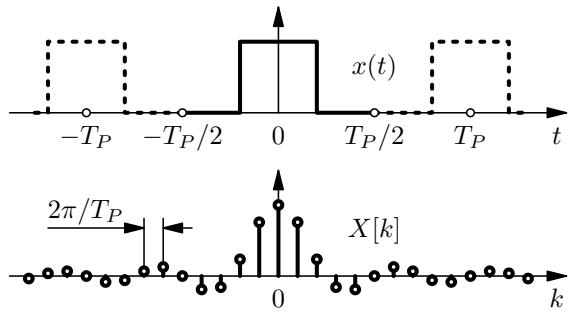


Vremenski diskretna Fourierova transformacija

Vremenski diskretna Fourierova transformacija (DTFT – Discrete-Time Fourier Transform) se koristi za prikaz nizova. Transformacijski par je $x[n] \leftrightarrow X(\omega)$ i vrijedi:

$$X(\omega) = \sum_{n=-\infty}^{+\infty} x[n]e^{-j\omega n}$$

$$x[n] = \frac{1}{2\pi} \int_{-\pi}^{\pi} X(\omega)e^{j\omega n} d\omega$$

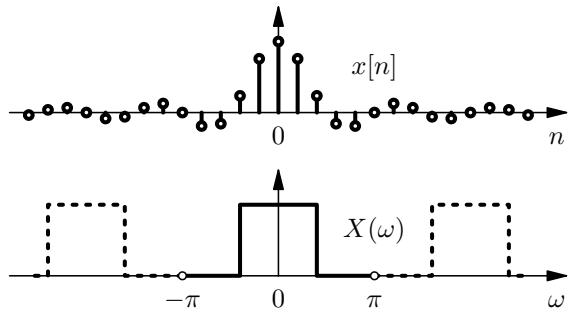


Diskretna Fourierova transformacija

Diskretna Fourierova transformacija se koristi za prikaz konačnog niza duljine N (DFT – Discrete Fourier Transform). Transformacijski par je $x[n] \leftrightarrow X[k]$ i vrijedi:

$$X[k] = \sum_{n=0}^{N-1} x[n]W_N^{kn}, \quad 0 \leq k \leq N-1$$

$$x[n] = \frac{1}{N} \sum_{k=0}^{N-1} X[k]W_N^{-kn}, \quad 0 \leq n \leq N-1$$

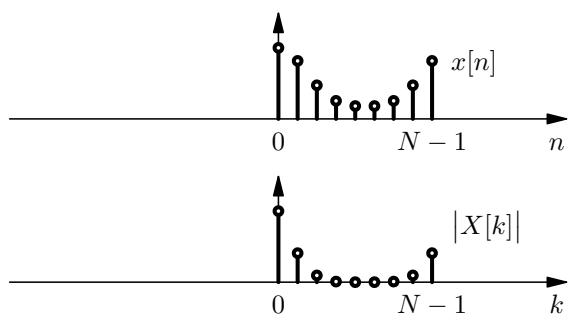

Transformacija je usko povezana s diskretnim Fourierovim redom (DFS – Discrete Fourier Series) koji se koristi za prikaz periodičkog niza. Izrazi su gotovo jednaki:

$$X[k] = \frac{1}{N} \sum_{n=0}^{N-1} x[n]e^{-2\pi j kn/N}$$

$$x[n] = \sum_{k=0}^{N-1} X[k]e^{2\pi j kn/N}$$

